

SPECIFICATIONS

CONTACT: Mechanical contact

CIRCUIT: SPST

RATING: DC 12V 50mA



TRAVEL: 0.3±0.15 mm

OPERATING FORCE: 160±50gf
260±50gf

CONTACT RESISTANCE: 100mΩ max.



LIFE: 100,000 cycles min.

DTS-62N






DTS-66	13.0 [512]	0.6 MAX [.0236 MAX]
DTS-65	9.5 [374]	
DTS-63	7.0 [275]	
DTS-62	5.0 [197]	0.5 MAX [.0197 MAX]
DTS-61	4.3 [169]	
PROD. NO.	H	I

DTS-24N

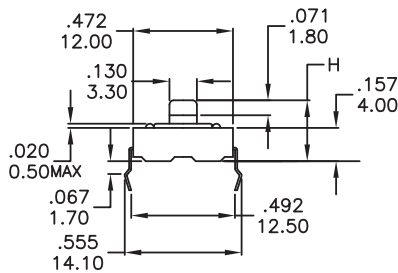



DTS-25	8.50 [335]
DTS-24	7.30 [287]
DTS-21	4.30 [169]
PROD. NO.	H

DTS-21N



DTS-25	8.50 [335]
DTS-24	7.30 [287]
DTS-21	4.30 [169]
PROD. NO.	H


DTSA-61N

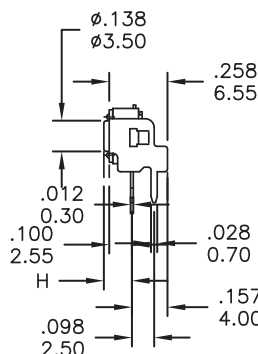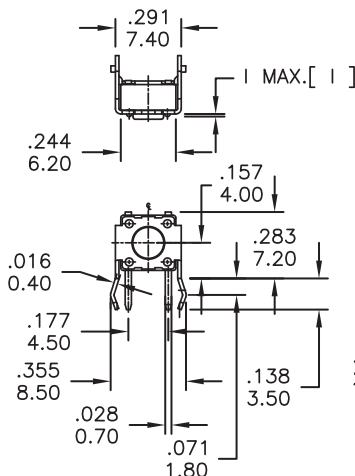

DTS-66	11.85 [467]	0.4MAX [.016MAX]
DTS-65	8.35 [329]	
DTS-63	5.85 [230]	
DTS-62	3.85 [152]	0.3MAX [.012MAX]
DTS-61	3.15 [124]	
PROD. NO.	H	I




DTSMW-66


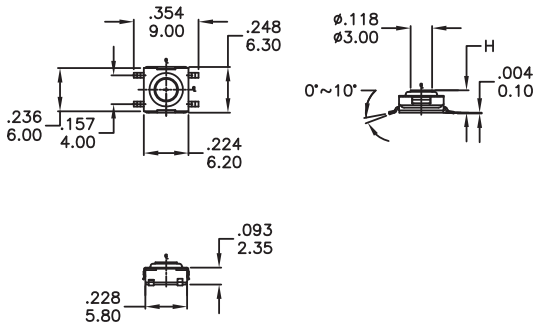


CONTACT: Stainless Steel.
CIRCUIT DISC: Phosphor brnze with Silver cladding.
RATING: Brass with silver cladding.
BASE: UL94V-0 PPA Hing-Temp. Thermoplastic

DTSMW-69	3.80[1.50]
DTSMW-68	2.30[.091]
DTSMW-67	5.20[.205]
DTSMW-66	3.10[.120]
DTSMW-65	3.50[.138]
DTSMW-64	4.50[.177]
PROD. NO.	H





DTSMW-68

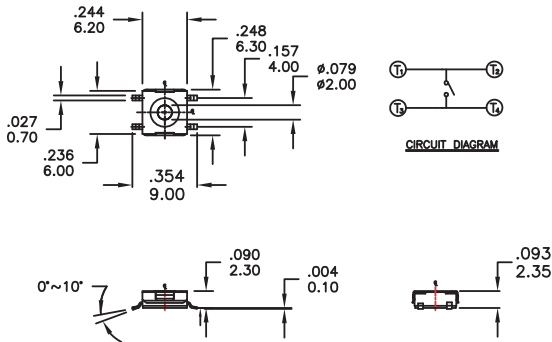


OPERATING FORCE		STEM COLOR
N	160gf	Brown
S	160gf	Silver
R	260gf	Red





TMG-533-V

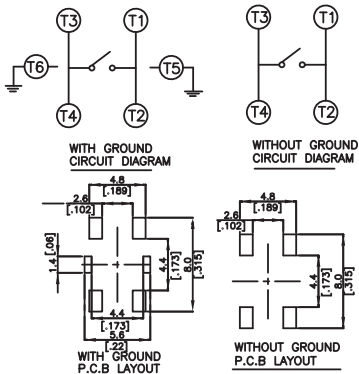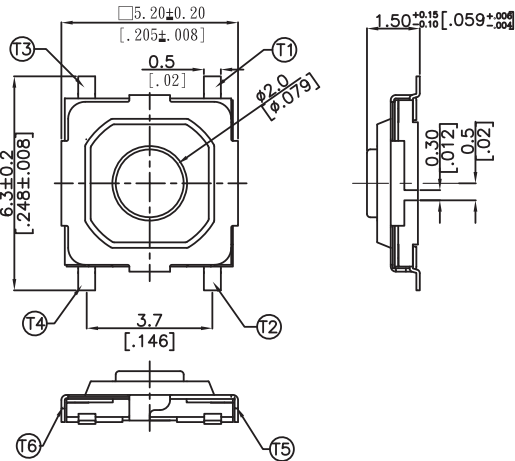

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.



TMG-523-V

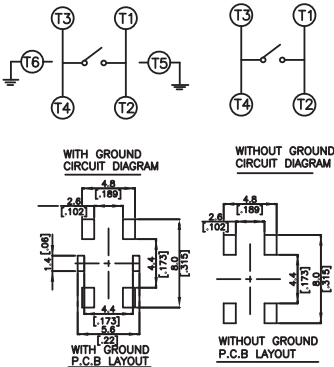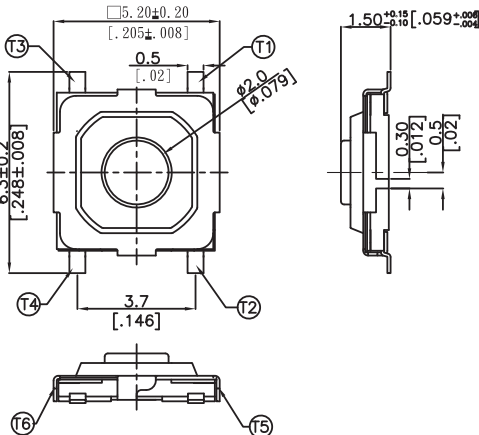

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.